

Model TC-R3105 Spec:I/B/P

5CH 1HDD PSE NVR


Tiandy



Features

- S+265 Compression
- 4-ch POE interface
- Plug&Play with up to 4 Independent POE Network Interfaces
- Up to 5MP Resolution Recording
- Support 5-ch Intelligent Analysis Process
- Smart Search&Recording
- Support ANR Function
- Cloud upgrade,IPC Cloud upgrade
- Plug in free
- 1x HDMI, 1x VGA, Same Video Source, Max Resolution 1080p
- 1 SATA(Up to 10TB), Alarm I/O 0/1, Audio I/O 1/1, 2 USB
- UI V3.0,Support free dragging of UI navigation bar
- CE, FCC

Dimensions

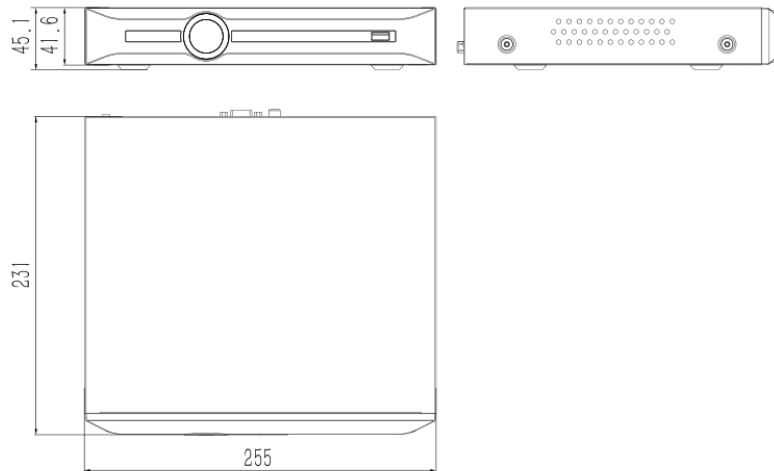

Specification

Video/Audio Input	
Video Input	5-ch
Audio Input	1-ch, 3.5mm
Network	
Incoming Bandwidth	40Mbps
Outgoing Bandwidth	40Mbps
Mobile Software	P2P/IP for IOS&Android (App Name: Easylive)
Internet Protocol	TCP/UDP/HTTP/MULTICAST/UPnP/DHCP/DDNS/NTP/RTSP/SADP Etc
Email	N/A
ANR	Y
Remote Connection	64
Browser	Support all browsers, including IE, Safari, Chrome, Edge. (H.265 only supports configuration in non-IE kernel browsers)
Advanced	Remaining Bandwidth Display



Tiandy Technologies Co., Ltd | en.tiandy.com
Add: No.8, Huake Rd2, Binhai Hi-Tech Industry(Huayuan), Tianjin 300384 China
Tel: +86-22-58596037 Email: sales@tiandy.com



Model TC-R3105 Spec:I/B/P

5CH 1HDD PSE NVR

Tiandy

Video/Audio Output	
HDMI Output	1-ch, Resolution 1920×1080, 1280×720, 1440×900, 1366×768, 1280×800, 1024×768, 800×600
VGA Output	1-ch, Resolution 1920×1080, 1280×720, 1440×900, 1366×768, 1280×800, 1024×768, 800×600 Adjustable Output mode, Self-adaptive Resolution
Audio Output	1-ch, RCA (Linear, 1kΩ)
Recording Resolution	5MP/4MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Synchronous Playback	2-ch 1080P/4-ch 720P
Display Split	1/3/4/6
Decoding	
Compression	S+265/H.265/H.264H/H.264M/H.264B
Preview Capability	2-ch 1080P/4-ch 720P
E-Zoom	Y
Hard Disk	
SATA	1 SATA for 1 HDD
eSATA	N/A
Capacity	Up to 10TB Capacity for Each HDD (0~45℃)
NTFS Files System	N/A
HDD Management	Group and Quota, Customized Recording Days
RAID	
RAID Mode	N/A
RAID Management	N/A
External Interface	
HDMI Output	1ch
VGA Output	1ch
POE	4 Independent 100 Mbps PoE Network Interfaces 45W(50W Optional), Max to 30W for Each Port
Network Interface	1 RJ-45 10/100 Self-adaptive Ethernet Interfaces
Serial Interface	N/A
USB Interface	2 x USB2.0
Alarm In/Out	0/1
Advance	
Video Analytics(VCA)	Camera VCA Function, including Tripwire/Double Tripwire/Perimeter/Object Abandon/Object Lost/Loitering/Running/Parking/Face Detection/Crowd/On duty Detection/Video Abnormal Detection/Audio Abnormal Detection/Video defocus diagnosis/Video scene transformation diagnosis
I-Frame Record	Y
Plug and Play	Y, Only for Tiandy Cameras
Image Flip	Y, Only for Tiandy Cameras
Corridor Mode	Y, Only for Tiandy Cameras
Smart Search	Quickly Search Target VCA Videos , Only for Tiandy Cameras
Trigger Recording	Manual/Timing/Motion Detection/Port Alarm/ VCA Alarm/Video Lost
Smart Recording	Set Recording Bit Rate for Different Time
Alarm Recording	Pre Alarm Default 10s (5/10/15/60s Optional) , Post Alarm Default 10s (10/15/30/60/600s Optional) .
One Key Control	Recording,one key add
Records Format	SDV, MP4
Records Encryption	Y
Records Tag	Y
Onvif	Onvif(Profile S)
General	
Language	English,Spanish,Korean,Italian,Turkish,Thai,Russian,Polish,French,Traditional Chinese,Simplified Chinese, Dutch, Hebrew (UI)
Power Supply	DC48V
Consumption(without HDD)	≤20W(Hard Disk is not included)
Working Temperature	-10 °C ~ +55 °C (+14 °F~ + 131 °F)
Working Humidity	10 % ~ 90 %
Chassis	1U
Dimensions	255mmx231mmx44mm
Weight	≤4KG (without HDD)

* The latest product information / specification can be found at <http://en.tiandy.com/>



Tiandy Technologies Co., Ltd | en.tiandy.com

Add: No.8, Huake Rd2, Binhai Hi-Tech Industry(Huayuan), Tianjin 300384 China

Tel: +86-22-58596037 Email: sales@tiandy.com

